

LUMINAIRE SPECIFICATION


DESCRIPTION:

This 10W fire guard LED Downlight is fire-rated to 90 minutes, IP65 Waterproof with very low power consumption, available dimmable or non-dimmable.

Being a one-piece design, the fire guard LED Downlight is the easiest and most convenient means of installing downlights into a fire rated ceiling. The product dimensions have been specially designed to fit into a standard range of fitting hole size, allowing easy replacement of existing MR16 or GU10 Fittings.

ILLUSTRATION, DETAILS, PHOTOMETRIC DATA

(Images are for illustration only and may be subject to change)

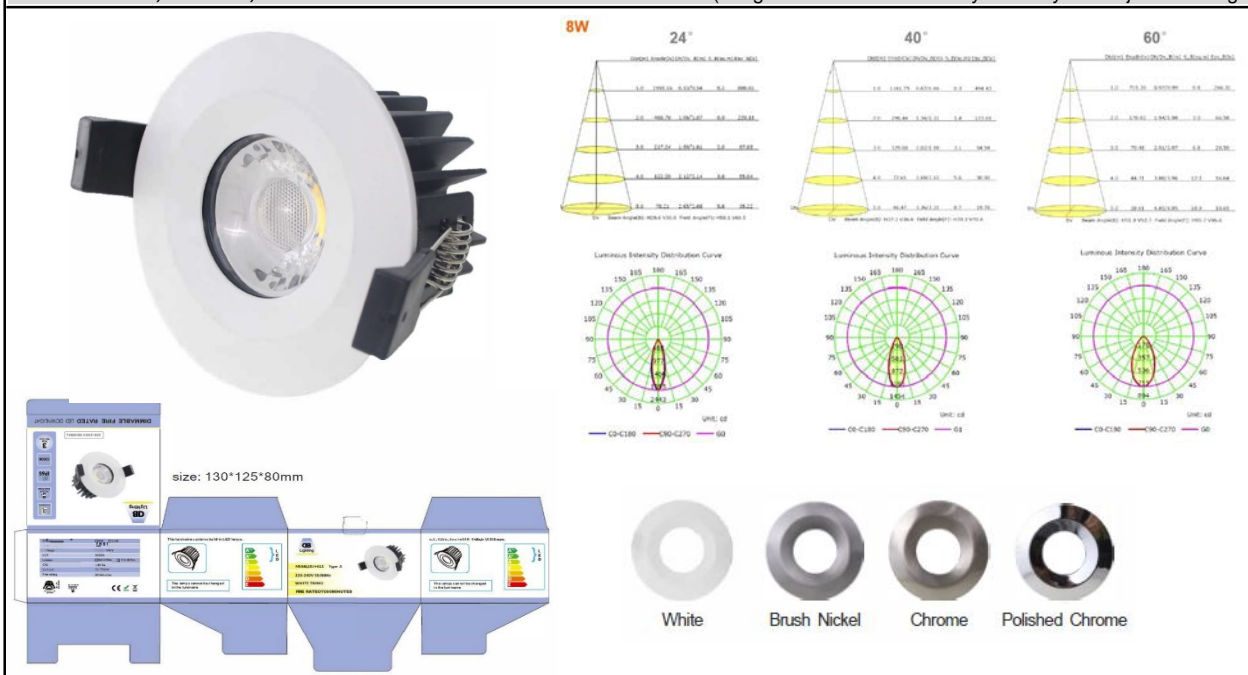

SUPPLIER

DB LIGHTING LTD
WILTON PARK
BEACONSFIELD
BUCKINGHAMSHIRE
HP9 2RW

EMAIL: david@dblighting.co.uk

MOBILE: +44 (0) 7794463318

TEL: +44 (0) 330 043 9848

CONTACT: DAVID BREHENEY

LUMINAIRE DETAILS

ORDER REF: MLRAV8FHE2MLRAV_X_X_X_X_X

FINISH: WHITE (W) White
 (B) Brush Nickel
 (C) Chrome
 (P) Polished Chrome

DIAMETER (mm) 85 85

CUT-OUT (mm) 75 72-75

DEPTH (mm) 56.5 56.5

BEAM ANGLE: 24°, 40°, 60°

SOURCE/LAMP DATA:

SOURCE TYPE: LEDLED
LAMP LOAD: 8W 6W, 8W, 10W
LUMEN OUTPUT: 550 490, 650, 800
EFFICACY: 81.2lm/W 88

LAMP LIFE: 50000 50,0000
COLOUR: 3000K 3000K / 4000K
COLOUR RENDERING: >80 >83
DRIVE CURRENT: 230v 220-240
DIMMING TYPE: Triac (S) Switch
 IP65 (PH) Phase Dimming
IP RATING: IP65

NOTES:



Manufacturing partner **Zhongshan M-Light Photoelectric Co Ltd** (part of the M-Light International Group)

No.16, North Kanglong Street, Ximao Village, Henglong Town, Zhongshan, Zhongshan